



## Partnerships

China Motor  
 Mugan Honda RR  
 Honda Taiwan (Testing)  
 Yamaha Motorcycle  
 Mitsubishi Motors  
 Mitsubishi Motors - Bus for  
 Taiwan Public Transportation  
 Mitsubishi Motors -  
 Canter Lorry

Isuzu -  
 ELF Lorry




## Racing Partners

Le mans 24hr Honda Team  
 Formula Renault  
 Formula China  
 C1 Supercup (Ferrari)  
 GT N1 series (Nissan Honda)  
 F3 Japan (Alfa Romeo)  
 A1 (Testing in England)



Rewards:  
 "THE BEST PRODUCT AWARD 2008"  
 from SEMA show Las Vegas, US

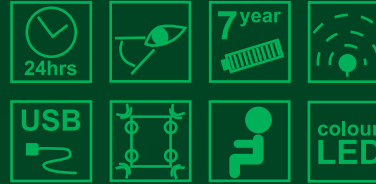

1. SENSOR AND TRANSMITTER SPECIFICATIONS	
Battery Life	More than 7 years, under normal conditions.
Storage temperature	-40°C ~ 125°C
Operating temperature	-30°C ~ 120°C
Operating humidity	Max 95 %
Operating frequency	433.92 MHz
Pressure monitoring range	0kPa ~ 535kPa or 0Bar ~ 5.35Bar or 0psi ~ 77psi
Pressure reading accuracy	±4°C in normal environmental conditions
Transmitting power	Max 5dBm
Power supply	3.6V Lithium Battery
Modulation	FSK
Sensor sample rate	every 3 second (Full-time running, non-stop)
Sample data transfer	every 30 second (Full-time running, non-stop)
Sensor weight	35g
1. RECEIVER / DISPLAY SPECIFICATIONS	
Operating voltage	12V DC
Operating current	200mA
Monitored temperature range	-30°C ~ 125°C
Operating temperature	-30°C ~ 85°C



**Tyresure**  
 Maple Court, Walker Road  
 Forest Business Park  
 Bardon Hill  
 Leicestershire  
 LE67 1TU

Tel: 01530 517920  
 Email: [info@tyresure.com](mailto:info@tyresure.com)  
 Web: [www.tyresure.com](http://www.tyresure.com)

- Monitors Tyre Pressure & Temperature
- 7 year sensor battery life
- Correct Tyre Pressure
- Saves Fuel
- Saves Tyre Wear
- Saves Lives

TPMS is mandatory on all new cars in the U.S.A  
[info@tyresure.com](mailto:info@tyresure.com) [www.tyresure.com](http://www.tyresure.com)

